


 **GUNNAR**NOVEX

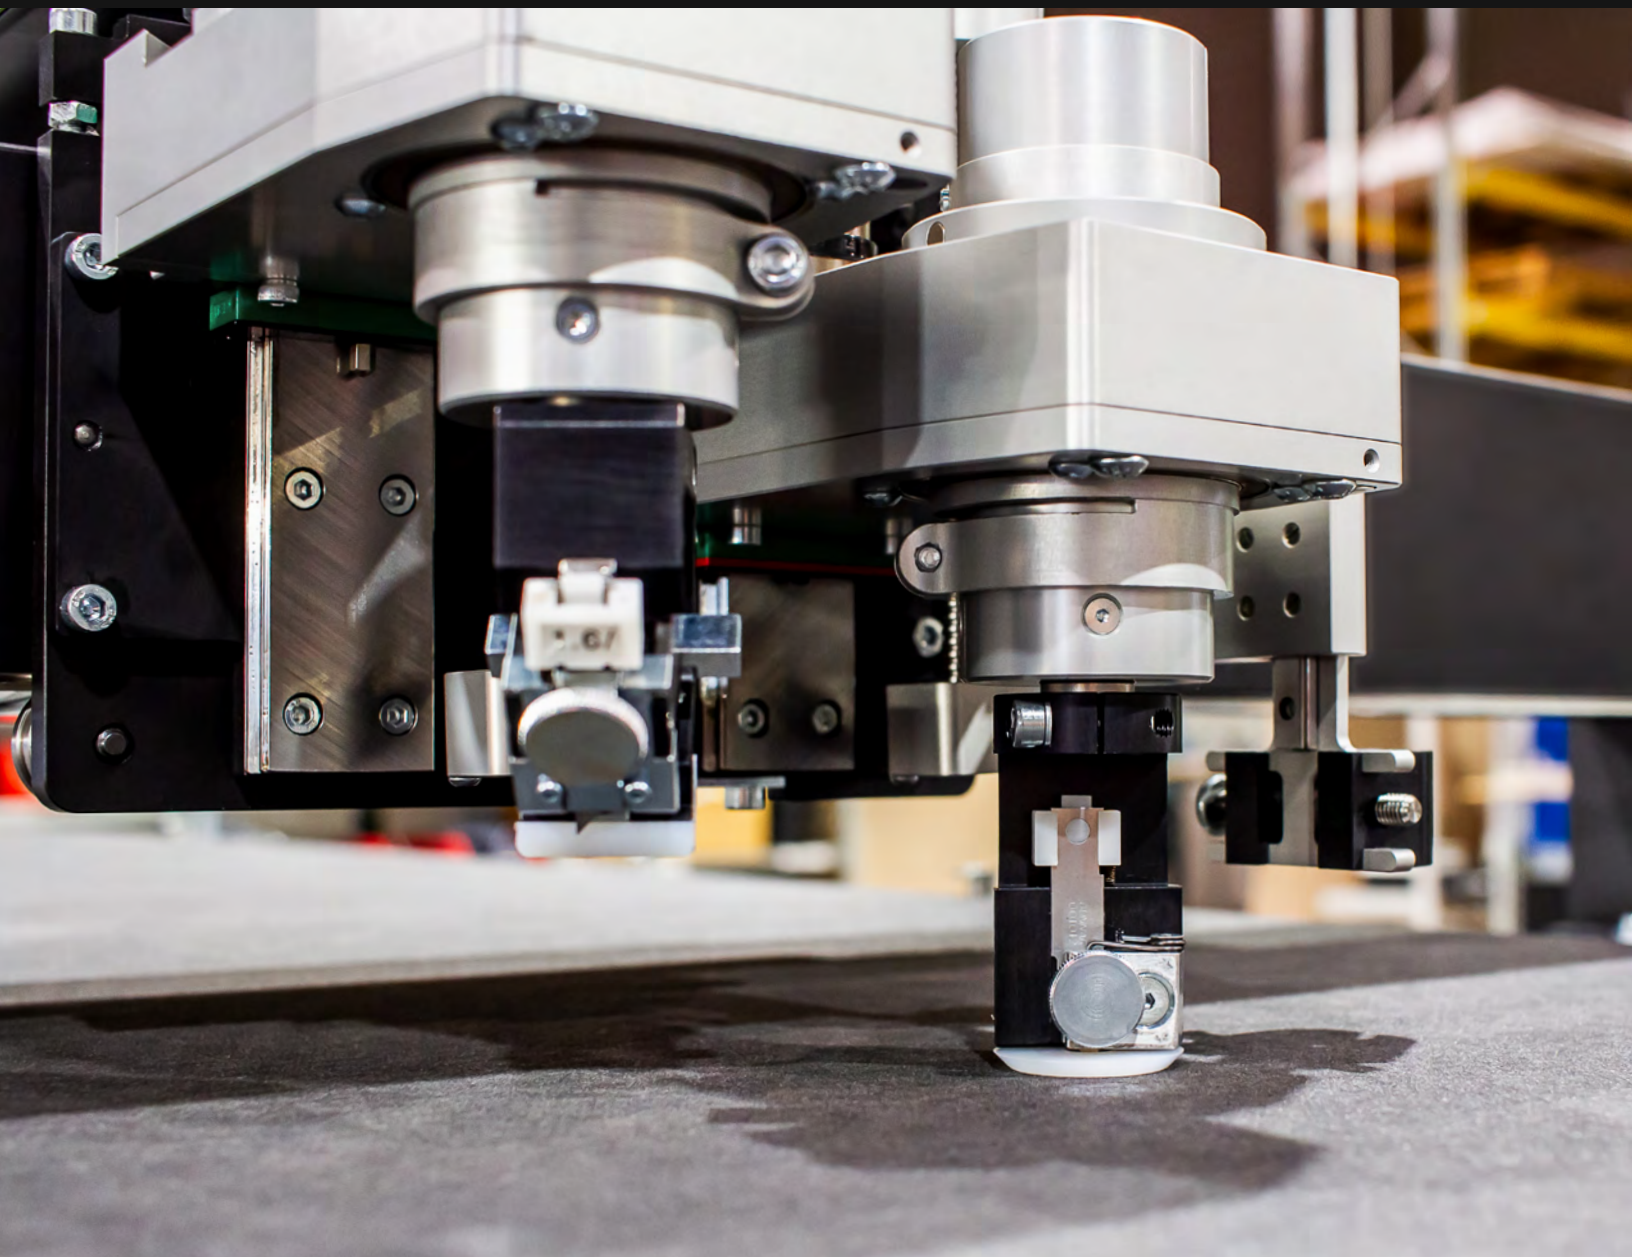

The GUNNAR NOVEX Décor Cutter

A modular and highly flexible precision cutting solution.

For décor and picture framing materials.

MACHINE CHARACTERISTICS

- Highly modular and upgradable machine and cutting tool concept
- Very compact and ergonomic cutter design
- Flexible tool adapter with easy to operate fast tool change system
- Very simple and fast blade change within seconds
- Fully dust protected control panel and electronics
- Front and back touchless, sensor based operator safety system

- Fully PC controlled operation with no extra additional operating panel
- CE certified
- High and constant cutting speed and acceleration
- Maintenance and service friendly
- Low operating and maintenance costs
- Compatible to a wide variation of data interchange formats

MAIN AREAS OF APPLICATION


- Picture Framing
- Wall Décor
- Museums
- Archival Solutions, Packaging
- Signage

MAIN TYPES OF MATERIALS

- Mat Board
- Foam, Foam Core, Dibond, Styrene
- Pre-printed Plexiglass, Aluminum, Plastics, Coated Material
- Cardboard, Corrugated Board, Backboard, Honeycomb
- Canvas



SMALL

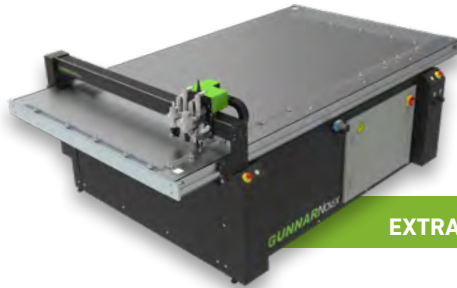

EXTRA LONG



BIG

NOVEX DÉCOR S

- Vacuum cutting window of 50" x 75"
- Twin multifunctional tool adapter head with each 1 3/4" fast tool changing system
- X/Y button finger clamps, user-optimized positioning

NOVEX DÉCOR SX

- Vacuum cutting window of 50" x 100"
- Twin multifunctional tool adapter head with each 1 3/4" fast tool changing system
- 3-side button finger clamps, cutter with COE function

NOVEX DÉCOR L

- Vacuum cutting window of 70" x 75"
- Twin multifunctional tool adapter head with each 1 3/4" fast tool changing system
- X/Y button finger clamps, user-optimized positioning



Twin Tool Adapter



Button Clamps



Vacuum Table



Integrated PC



CMD

BASIC CONFIGURATION OF ALL CUTTER MODELS

- Cutter operating software GMC GUNNAR MAT CREATOR
- Vacuum table
- Servo drive based 4-axis-control
- Fully digital bus based communication system
- Positioning laser

EXTENDED CONFIGURATION OPTIONS FOR ALL CUTTER MODELS

- Integrated PC screen holder with standard VESA mount
- Integrated IP67 19" touch based PC operation center
- Universal clamping tool holder for marking tools UTH
- GUNNAR CMD crop mark detection unit
- Dynamic frequency transformer based vacuum system

SELECTED TOOLS FOR ALL CUTTER MODELS

- 45° Bevel Cut Tool
- 90° Straight Cut Tool
- Electrical driven oscillation tool EOT
- Electrical driven rotation tool ERT
- Routing tool head

MAIN OPERATING FIGURES OF ALL CUTTER MODELS

- Max cutting speed 60"/s
- Max positioning speed 80"/s
- Max acceleration 32ft/s² (1G)
- Positioning accuracy +/- 0.005"
- Overall max material thickness/clearance 1"